

# FLF-3200-60

## DC~3.2GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~3.2GHz
Stop Band Attenuation:	60dB@3.6GHz min. 60dB@3.6~20GHz min.
Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Input Power:	10W max.
Impedance:	50Ω

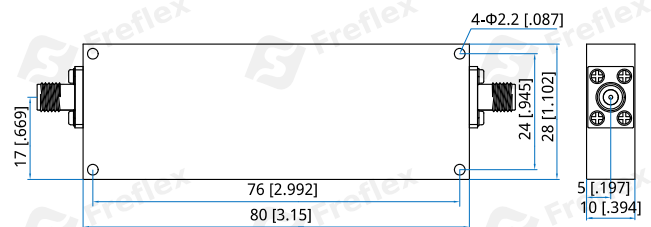
**Mechanical**

Size <sup>*1</sup> :	80*28*10mm 3.15*1.102*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**FLF-3200-60**

Customization is available upon request.