

# FLF-330-60

## DC~0.33GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

|                        |                      |
|------------------------|----------------------|
| Frequency:             | DC~0.33GHz           |
| Insertion Loss:        | 0.5dB max.           |
| VSWR:                  | 1.3 max.             |
| Stop Band Attenuation: | 60dB@0.643~3GHz min. |
| Average Power:         | 1W Max.              |
| Impedance:             | 50Ω                  |

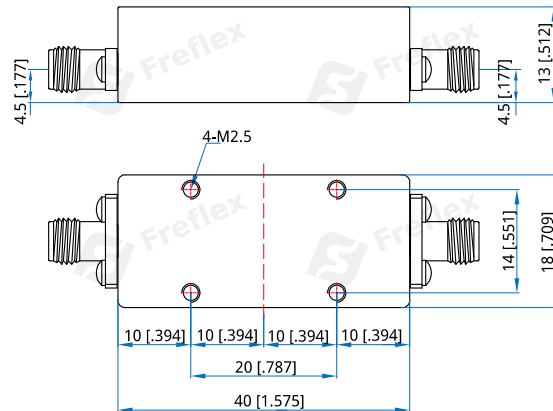
**Mechanical**

|                      |                                   |
|----------------------|-----------------------------------|
| Size <sup>*1</sup> : | 40*18*13mm<br>1.575*0.709*0.512in |
| RF Connectors:       | SMA Female                        |
| Mounting:            | 4-M2.5 through-hole               |

[1] Exclude connectors

**Environmental**

|                        |           |
|------------------------|-----------|
| Operating Temperature: | -30~+70°C |
|------------------------|-----------|

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**FLF-330-60**

Customization is available upon request.