

FLF-3500-40

DC~3.5GHz, 40dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~3.5GHz
Pass Band Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stop Band Attenuation:	40dBc@3.85~18GHz min.
Input Power:	10W max.
Impedance:	50Ω

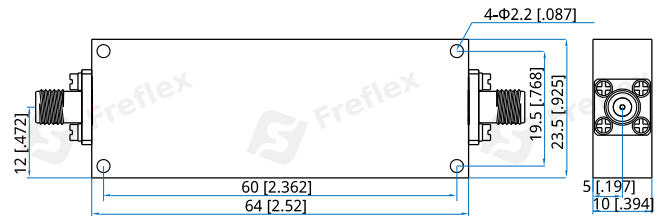
Mechanical

Size ^{*1} :	64*23.5*10mm 2.52*0.925*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FLF-3500-40

Customization is available upon request.