

# FLF-480-30

## DC~0.48GHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

|                        |                     |
|------------------------|---------------------|
| Frequency:             | DC~0.48GHz          |
| Insertion Loss:        | 3dB max.            |
| Passband Flatness:     | 3dB max.            |
| VSWR:                  | 1.5 max.            |
| Stop Band Attenuation: | 30dB@0.53~3GHz min. |

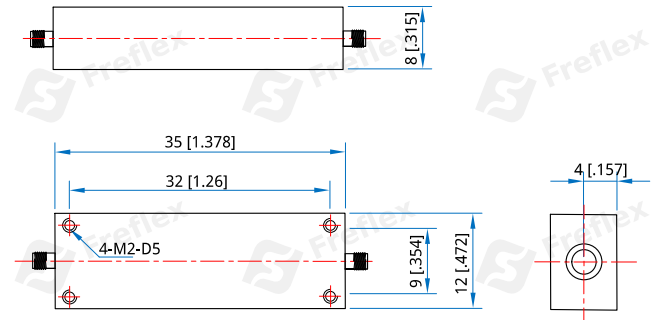
**Mechanical**

|                      |                                  |
|----------------------|----------------------------------|
| Size <sup>*1</sup> : | 35*12*8mm<br>1.378*0.472*0.315in |
| RF Connectors:       | SMA Female                       |
| Mounting:            | 4-M2 depth 5mm                   |

[1] Exclude connectors

**Environmental**

|                            |           |
|----------------------------|-----------|
| Operating Temperature:     | -40~+70°C |
| Non-operating Temperature: | -55~+85°C |

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**FLF-480-30**

Customization is available upon request.