

FLF-500-45

DC~0.5GHz, 45dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~0.5GHz
Insertion Loss:	1.5dB max.
VSWR:	1.8 max.
Stop Band Attenuation:	45dB@0.6~1GHz min.
Average Power:	7W

Mechanical


Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA Female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

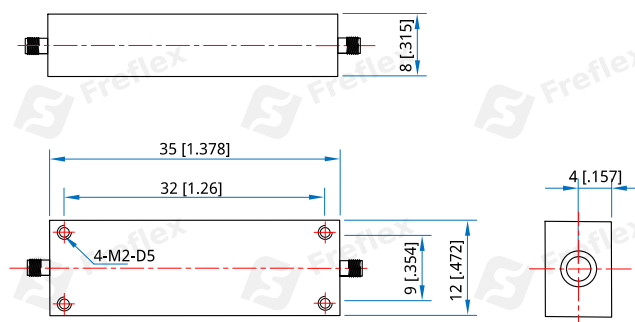

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FLF-500-45

Customization is available upon request.