

FLF-8000-40-1

DC~8GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~8GHz
Passband Insertion Loss:	1.2dB max.
VSWR:	1.5 max.
Stopband Attenuation:	40dB@8.9~16GHz min.
Input Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	27*16*10mm 1.063*0.63*0.394in
RF Connectors:	SMA female
Mounting:	4-Φ2.2mm through-hole
Weight:	28g typ.

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

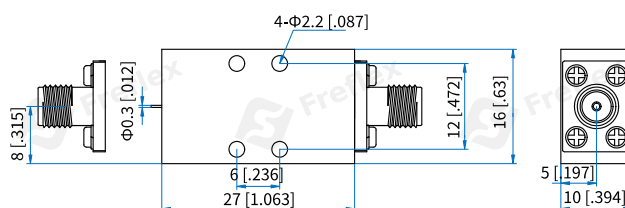

Unit: mm [in]

Tolerance: ±0.508mm [±0.02in]

How To Order

FLF-8000-40-1

Customization is available upon request.