

# FLPA0325

## DC~3GHz, 25W

Features:  
 \* Low VSWR  
 \* Low PIM

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency:	DC~3GHz
Attenuation:	3, 6, 10, 20, 30dB
Impedance:	50Ω
IM3:	-120dBc@2*33dBm
Average Power <sup>*1</sup> :	25W@25°C
Peak Powe:	1KW (5 μs pulse width, 2.5% load cycle)

[1]Derated linearly to 2.5W@125°C.

### Mechanical

Size:	Φ38*83mm Φ1.496*3.268in
RF Connectors:	N male, N female

### Environmental

Temperature: -55~+125°C

### Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)					VSWR (max.)
	3	6	10	20	30	
DC~3	±0.4	±0.4	±0.5	±0.6	±0.6	1.2

### How To Order

**FLPA0325-W-X-Y-Z**

W: Frequency in GHz

X: Attenuation in dB

Y: Connector type

Z: IM3

Connector naming rules:

N - N male to N female

IM3 naming rules:


120 - 120dBc

Examples:

To order an termination, DC~3GHz, 3dB, N male to N female, -120dBc, specify FLPA0325-3-3-N-120.

Customization is available upon request

### Outline Drawings

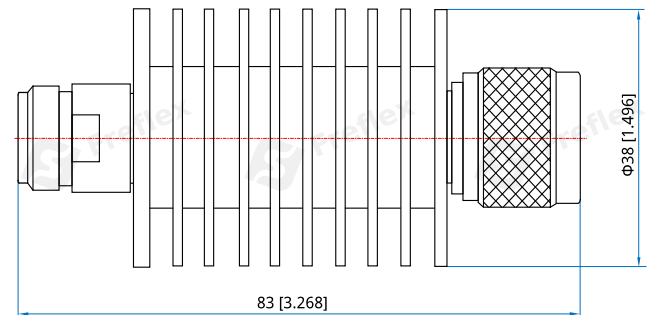

Unit: mm [in]  
 Tolerance: ±5%