

FWT15-5 WR-15, 5W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 49.8~75.8GHz
Average Power: 5W
VSWR: 1.08 max.


Mechanical

Waveguide Size: WR-15 (BJ620)
Flange: FUGP620

Environmental

Temperature: -55~+125°C

Outline Drawings

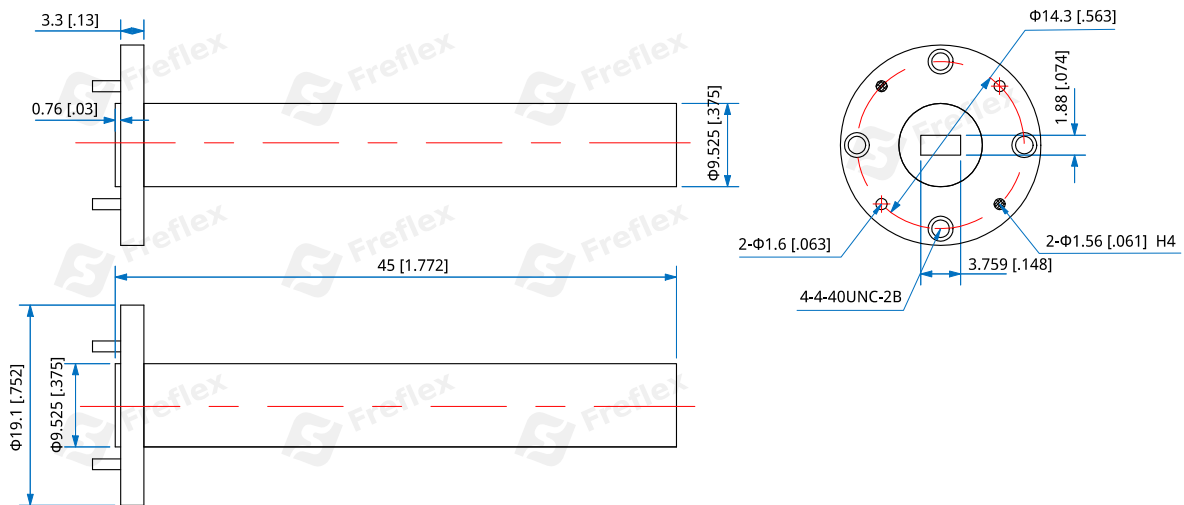

Outline A

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWT15-5-Y-Z

Y : Material

Z : Flange type

Material naming rules:

B - Brass(Outline A)

Flange naming rules:

6 - FUGP620 (Outline A)

Examples:

To order a low power waveguide termination, WR-15, 5W, Brass, FUGP620, specify FWT15-5-B-6.

Customization is available upon request.