Freflex

Low Power Waveguide Termination

FWT187-60

WR-187, 60W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency:	3.94~5.99GHz
Average Power:	60W
VSWR:	1.03 max.

Mechanical

Waveguide Size:	WR-187 (BJ48)
Flange:	FDP48

Environmental

Temperature:	-55~+125℃

Outline Drawings

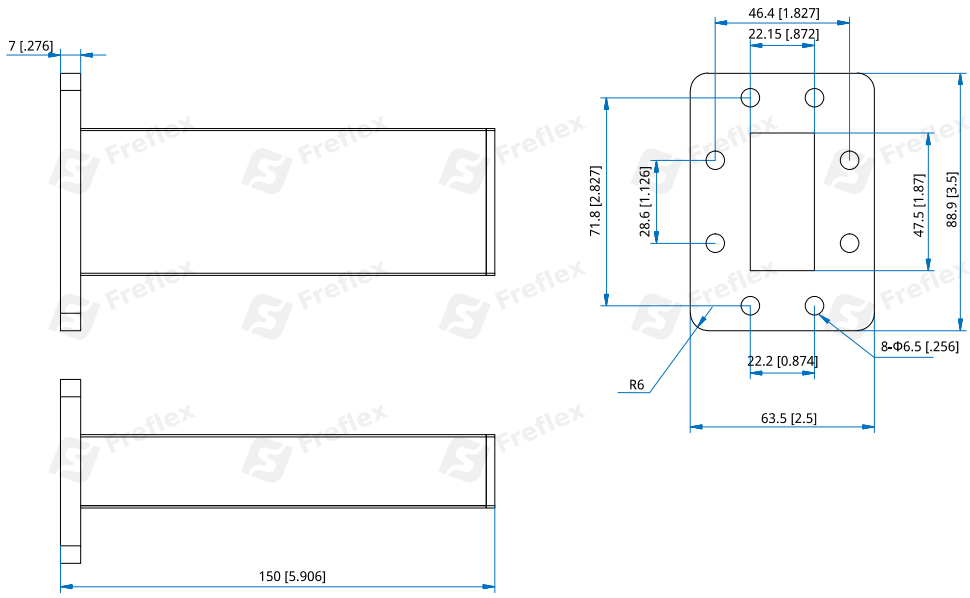

Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FWT187-60-Y-Z

Y : Material
Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
2 - FDP48 (Outline A)

Examples:
To order a low power waveguide termination, WR-187, 60W, Aluminum, FDP48, specify FWT187-60-A-2.

Customization is available upon request.