



FWT3-R5 WR-3, 0.5W

Features:
* Low VSWR
* Broadband

Applications: * Transmitters

* Antennas

* Laboratory Test

* Impedance Matching

Electrical

Frequency: 220~325GHz Average Power 0.5W max.

VSWR: 1.1 max.

Mechanical

Interface: WR-3

Environmental


Operation Temperature: 0~+40°C No-Operation Temperature: -40~+70°C

How To Order

FWT3-R5

Customization is available upon request.

Outline Drawings

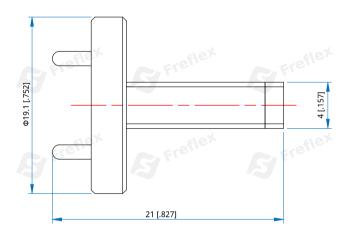

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1