

FWT340-K1

WR-340, 100W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 2.17~3.3GHz
Average Power: 100W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-340 (BJ26)
Flange: FDP26


Environmental

Temperature: -55~+125°C

Outline Drawings

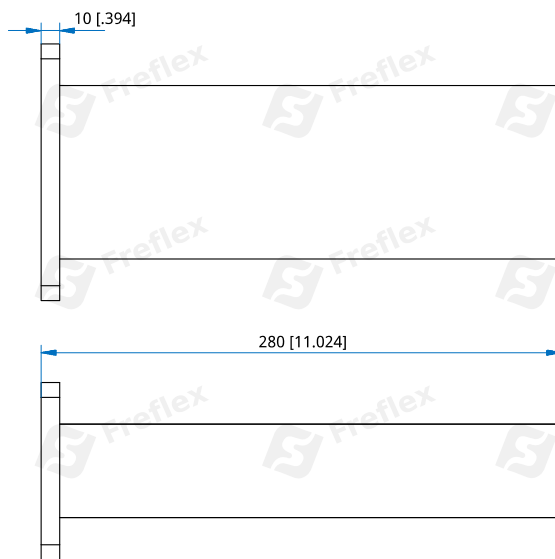

Outline A

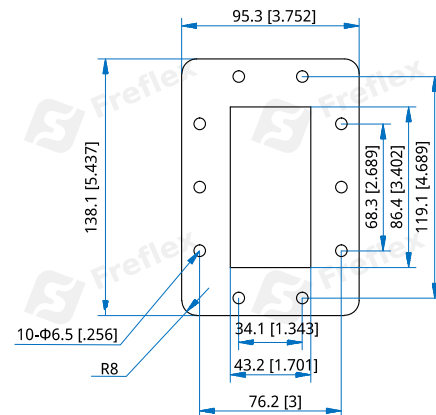

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FWT340-K1-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2 - FDP26 (Outline A)

Examples:

To order a low power waveguide termination, WR-340, 100W, Aluminum, FDP26, specify FWT340-K1-A-2.

Customization is available upon request.