

FWT112-K15

WR-112, 150W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 6.57~10GHz
Average Power: 150W
VSWR: 1.2 max.


Mechanical

Waveguide Size: WR-112 (BJ84)
Flange: FBP84

Environmental

Temperature: -55~+125°C

Outline Drawings

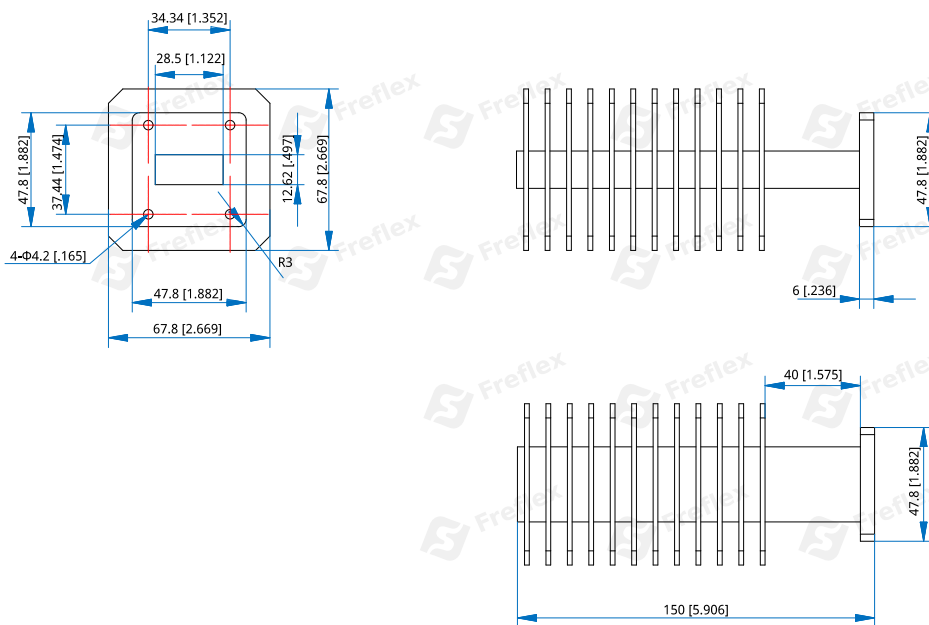

Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FWT112-K15-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
1 - FBP84 (Outline A)

Examples:

To order a medium power waveguide termination, WR-112, 150W, Aluminum, FBP84, specify FWT112-K15-A-1.

Customization is available upon request.