

FWT22-K1

WR-22, 100W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching


Electrical

Frequency: 33~50GHz
 Average Power: 100W
 VSWR: 1.2 max.

Mechanical

Interface: WR-22 (BJ400)
 Flange: FUGP400
 Finish: Conductive oxidation
 Coating: Black paint

Outline Drawings

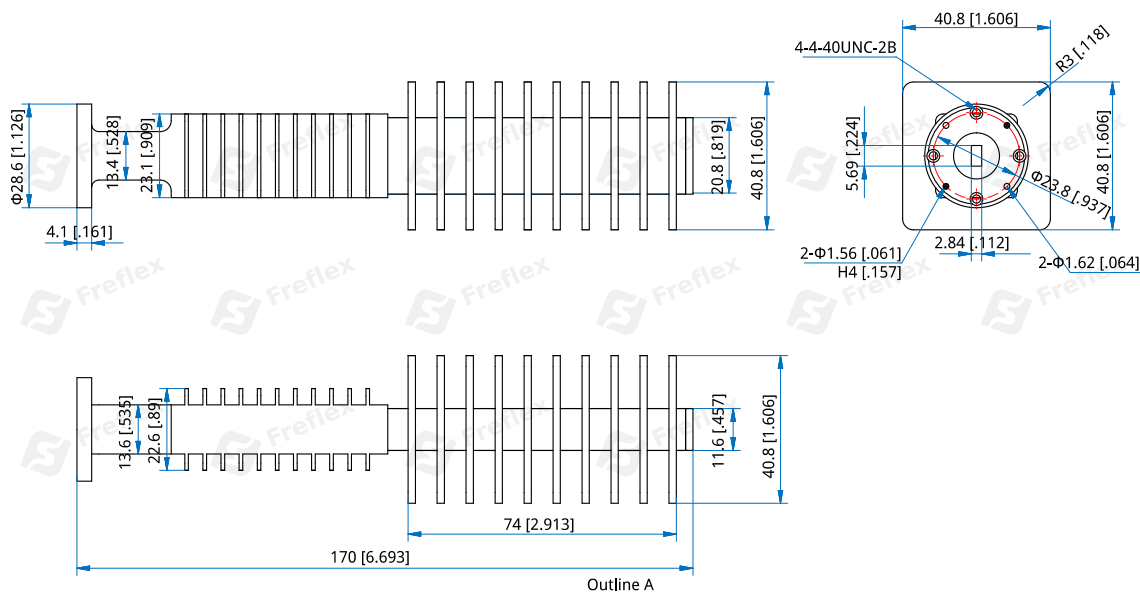

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWT22-K1-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

5 - FUGP400 (Outline A)

Examples:

To order a medium power waveguide termination, WR-22, 100W, Aluminum, FUGP400, specify FWT22-K1-A-5.

Customization is available upon request.