

FWT22-K5

WR-22, 500W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching


Electrical

Frequency: 32.9~50.1GHz
 Average Power: 500W min.
 VSWR: 1.2 max.

Mechanical

Interface: WR-22 (BJ400)
 Flange: FBP320 (Outline A)
 FUGP400 (Outline B)
 Material: Aluminium
 Finish: Conductive oxidation
 Coating: Black paint

Outline Drawings

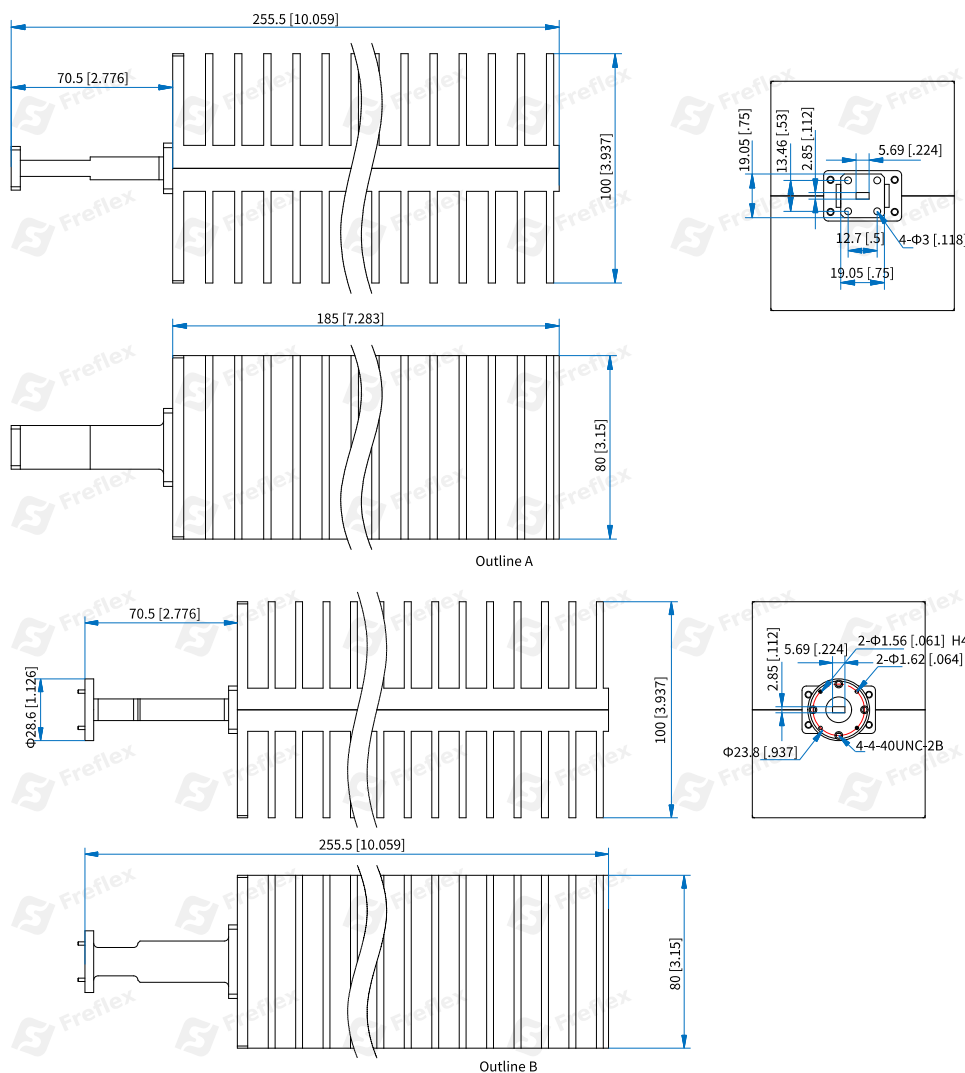

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWT22-K5-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A, B)

Flange naming rules:

1 - FBP320 (Outline A)

5 - FUGP400 (Outline B)

Examples:

To order a medium power waveguide termination, WR-22, 500W, Aluminum, FBP320, specify FWT22-K5-A-1.

Customization is available upon request.