

FWT229-K3

WR-229, 300W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 3.22~4.9GHz
Average Power: 300W
VSWR: 1.2 max.


Mechanical

Waveguide Size: WR-229 (BJ40)
Flange: FDP40

Environmental

Temperature: -55~+125°C

Outline Drawings

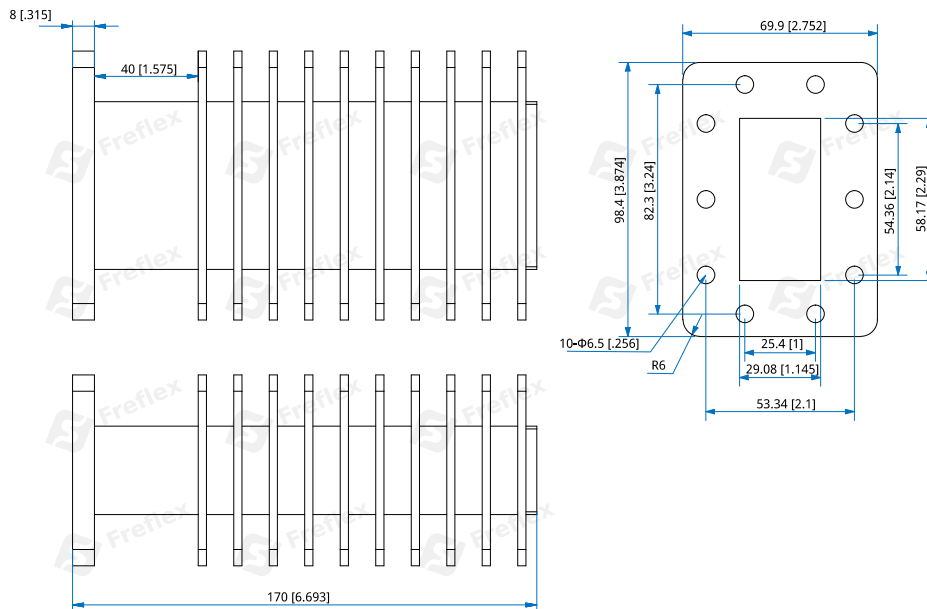

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWT229-K3-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2 - FDP40 (Outline A)

Examples:

To order a medium power waveguide termination, WR-229, 300W, Aluminum, FDP40, specify FWT229-K3-A-2.

Customization is available upon request.