

FWT28-K3
WR-28, 300W

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency:	26.3~40GHz
Average Power:	300W
VSWR:	1.2 max.

Mechanical

Waveguide Size:	WR-28 (BJ320)
Flange:	FBP320
Finish:	Conductive oxidation
Coating:	Black paint

How To Order

FWT28-K3-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:


1 - FBP320 (Outline A)

Examples:

To order a high power waveguide termination, WR-28, 300W, Aluminum, FBP320, specify FWT28-K3-A-1.

Customization is available upon request.

Outline Drawings

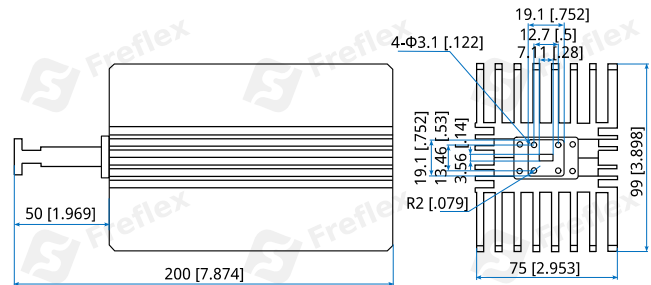

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]