

## FWT90-K2

### WR-90, 200W

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching


#### Electrical

Frequency: 8.2~12.5GHz  
VSWR: 1.2 max.  
Average Power: 200W

#### Mechanical

Waveguide Size: WR-90 (BJ100)  
Flange: FBP100  
Material: Aluminium

#### Outline Drawings

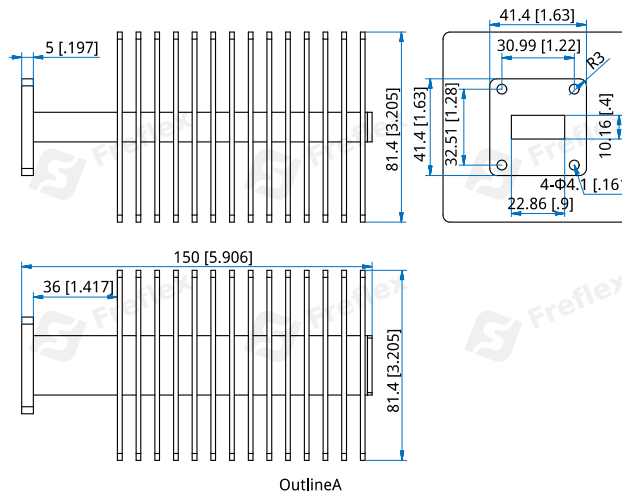

Unit: mm [in]

Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]

#### How To Order

**FWT90-K2-Y-Z**

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP100 (Outline A)

Examples:

To order a low power waveguide termination, WR-90, 200W, Aluminum, FBP100, specify FWT90-K2-A-1.

Customization is available upon request.