

FBMTK2-2 200W

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency Range:	5~6GHz
Average Power*1:	200W@25°C
VSWR:	2±0.3
Peak Power:	5KW (5μS pulse width, 4% duty cycle)

[1] Derated linearly to 20W@125°C.


Mechanical

Connector:	N female
Weight:	1.8Kg
Housing:	Aluminum
Outer Conductor:	Nickel plated brass
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings

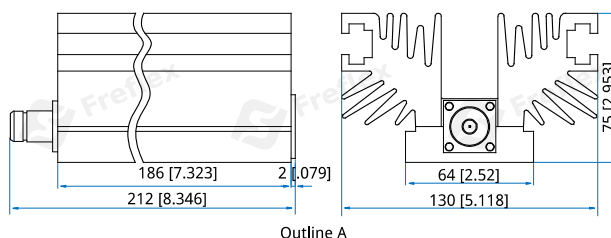

Unit: mm [in]

Tolerance: ±3%

How To Order

FBMTK2-5000-6000-2-NF

Customization is available upon request.