

## FC-8-FB-A220-1

### DC~67GHz, GPPO Female

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency: DC~67GHz  
Impedance: 50Ω  
VSWR: 1.5 max.

#### Mechanical

Mating Cable: FA220, FT67, CXN3506  
Matching PCB Connector: FC-8-MB-02  
Conductor: Gold plated beryllium copper  
Connector\*1: GPPO female

[1] Mateable with SSMP, SMPM & Mini-SMP.

#### Environmental


Temperature: -55~+85°C

#### How To Order

**FC-8-FB-A220-1**

Customization is available upon request.

#### Outline Drawings

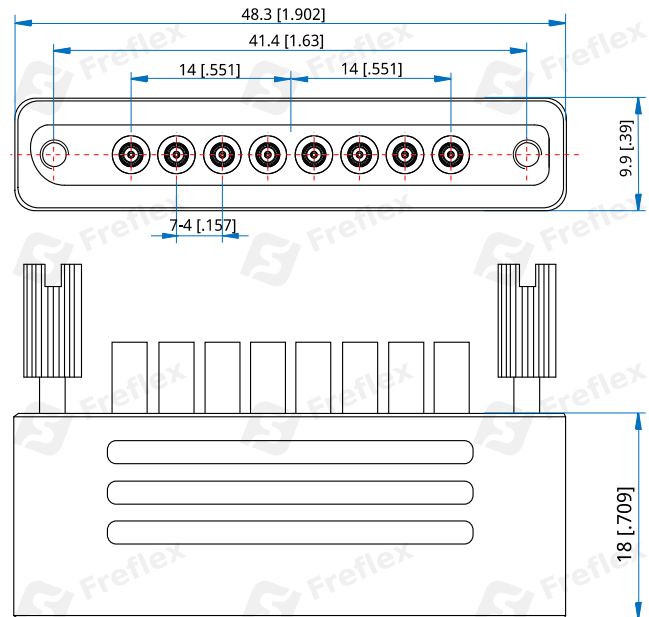

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]