

FMP2-0-15000-1

DC~2GHz, 3~15GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	DC~2GHz
Channel 2 (H):	3~15GHz
Passband Insertion Loss:	1.5dB max.
Rejection (L):	50dB min. @3~15GHz
Rejection (H):	50dB min. @DC~2GHz
VSWR:	2 max.
Isolation:	50dB min.
Input power:	1W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	41.5*41*10mm
	1.634*1.614*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

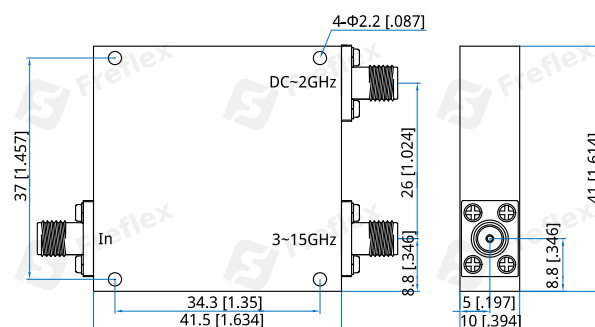

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-0-15000-1

Customization is available upon request.