

FMP2-0-5000-1

DC~0.95GHz, 1.4~5GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	DC~0.95GHz
Channel 2 (H):	1.4~5GHz
Passband Insertion Loss:	0.6dB max. @0.475GHz 1.0dB max. @3.2GHz
Rejection (CH L):	50dB min. @1.4~5GHz
Rejection (CH H):	50dB min. @DC~0.95GHz
VSWR:	1.5 max.
Input Power:	10W
Impedance:	50Ω

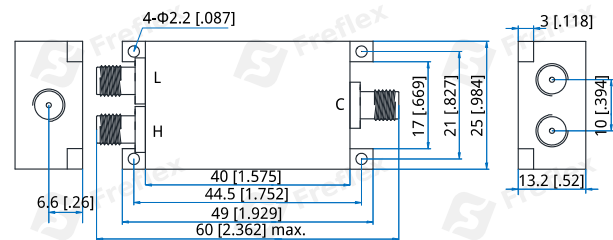
Mechanical

Size ^{*1} :	49*25*13.2mm 1.929*0.984*0.52in
RF Connectors:	SMA Female
Mounting:	4-4-Φ2.2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-0-5000-1

Customization is available upon request.