

FMP2-0-5000-2

DC~0.915GHz, 1.396~5GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	DC~0.915GHz
Channel 2 (H):	1.396~5GHz
Passband Insertion Loss:	1dB max.
Rejection (CH L):	30dBc min. @1.396~5GHz
Rejection (CH H):	50dBc min. @DC~0.915GHz
VSWR:	1.5 max.
Input Power:	5W
Impedance:	50Ω

Mechanical


Size ^{*1} :	35*24*21mm 1.378*0.945*0.827in
RF Connectors:	SMA Female
Mounting:	4-4-Φ1.8 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+70°C
------------------------	-----------

Outline Drawings

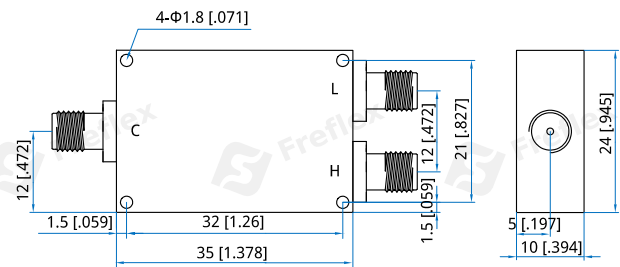

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-0-5000-2

Customization is available upon request.