

FMP2-0-5000-3

DC~0.5GHz, 1~5GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	DC~0.5GHz
Channel 2 (H):	1~5GHz
Passband Insertion Loss:	1dB max.
Rejection (CH L):	50dBc min. @1~5GHz
Rejection (CH H):	50dBc min. @DC~0.5GHz
VSWR:	1.5 max.
Input Power:	1W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	30*12*10mm 1.181*0.472*0.394in
RF Connectors:	SMA Female
Finish:	Black paint

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

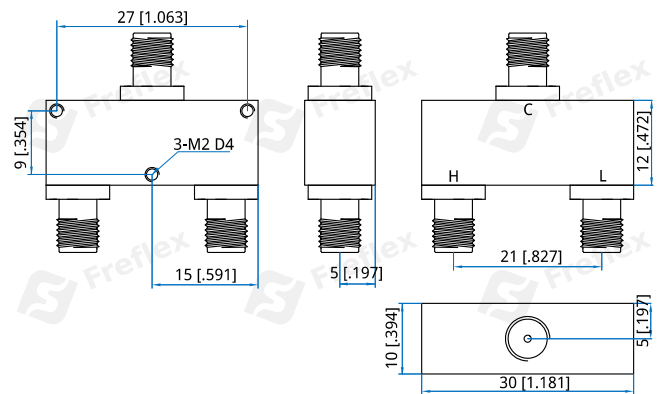

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-0-5000-3

Customization is available upon request.