

FMP2-0-8000-1

DC~1GHz, 2~8GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	DC~1GHz
Channel 2 (H):	2~8GHz
Passband Insertion Loss:	1.5dB max.
Rejection (CH L):	50dB min. @2~8GHz
Rejection (CH H):	50dB min. @DC~1GHz
VSWR:	2 max.
Input Power:	10W
Impedance:	50Ω

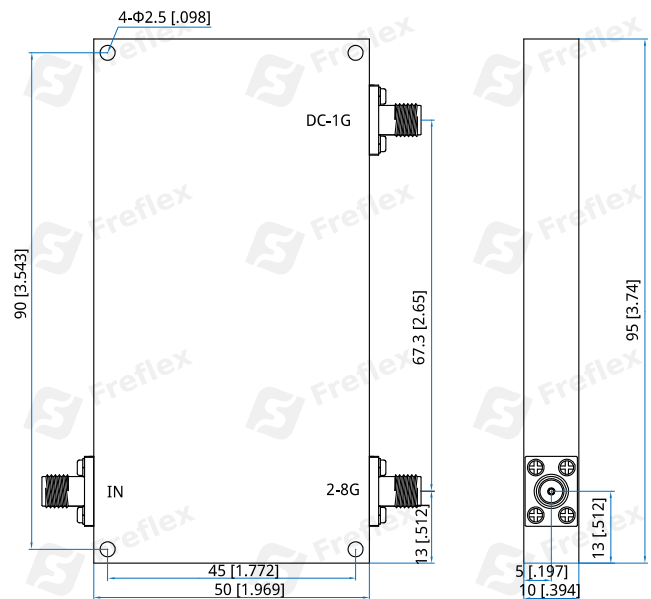
Mechanical

Size ^{*1} :	95*50*10mm 3.74*1.969*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-0-8000-1

Customization is available upon request.