

FMP2-1025-1095-1

1.025~1.035GHz, 1.085~1.095GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	1.025~1.035GHz
Channel 2 (H):	1.085~1.095GHz
Passband Insertion Loss:	1.0dB max.
Rejection (L):	70dB min. @1.085~1.095GHz
Rejection (H):	70dB min. @1.025~1.035GHz
VSWR:	1.3 max.
Input Power:	30W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	156*92*34mm 6.142*3.622*1.339in
RF Connectors:	N female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

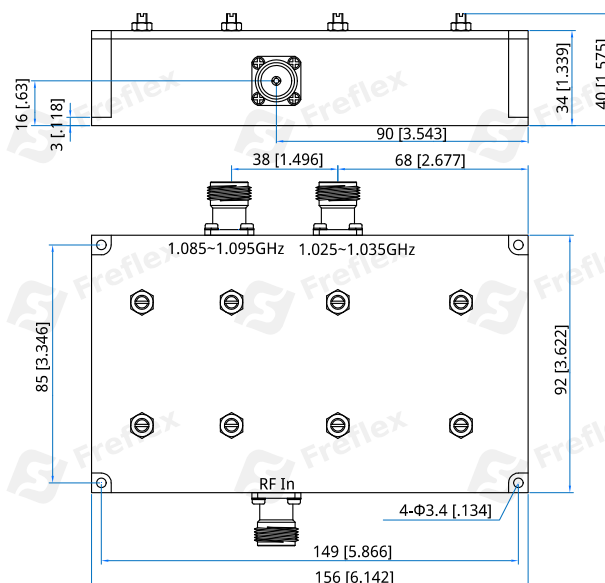

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-1025-1095-1

Customization is available upon request.