

FMP2-10700-14500-2

10.7~12.75GHz, 13~14.5GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

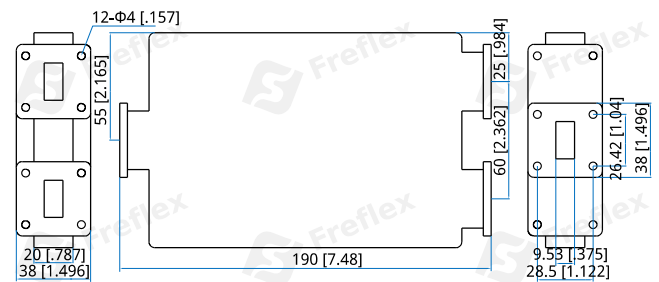
Channel 1 (L):	10.7~12.75GHz
Channel 2 (H):	13~14.5GHz
Passband Insertion Loss:	0.8dB max.
Isolation:	70dB min.
VSWR:	1.3 max.
Input Power:	100W
Impedance:	50Ω

Mechanical

Waveguide Size:	WR-75 (BJ120)
Mounting:	12-Φ4mm through-hole

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order
FMP2-10700-14500-2

Customization is available upon request.