

FMP2-1513-1680-1

1.513~1.53GHz, 1.663~1.68GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	1.513~1.53GHz
Channel 2 (H):	1.663~1.68GHz
Passband Insertion Loss:	0.8dB max.
Isolation:	70dB
Rejection (CH L):	30dB min. @1.4215GHz, 1.6215GHz
Rejection (CH H):	30dB min. @1.5715GHz, 1.7715GHz
VSWR:	1.5 max.
Input Power:	40W (average)
Impedance:	50Ω

Mechanical


Size ^{*1} :	123*65*27mm 4.843*2.559*1.063in
RF Connectors:	SMA Female
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+70°C

Outline Drawings

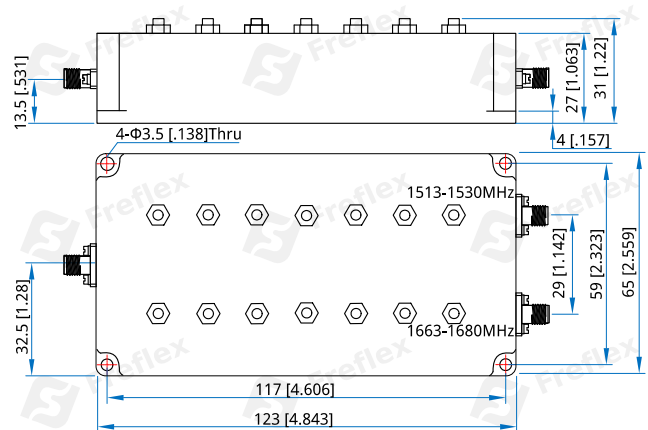

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-1513-1680-1

Customization is available upon request.