

FMP2-1700-7000-1

1.7~2GHz, 3~7GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	1.7~2GHz
Channel 2 (H):	3~7GHz
Passband Insertion Loss:	1.5dB max.
Rejection (CH L):	55dB min. @3~7GHz
Rejection (CH H):	55dB min. @1.7~2GHz
VSWR:	1.5 max.
Input Power:	15W
Impedance:	50Ω

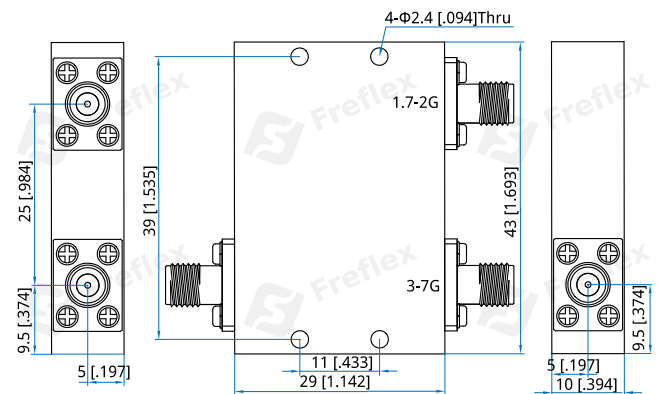
Mechanical

Size ^{*1} :	43*29*10mm 1.693*1.142*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.4mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-1700-7000-1

Customization is available upon request.