

FMP2-1710-1880-1

1.71~1.785GHz, 1.805~1.88GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (RX):	1.71~1.785GHz
Channel 2 (TX):	1.805~1.88GHz
Passband Insertion Loss:	1dB max.
VSWR:	1.3 max.
Ripple in Band:	0.8dB max.
Isolation (RX):	70dB min. @1.805~1.88GHz
Isolation (TX):	70dB min. @1.71~1.785GHz
Input Power:	15W
Impedance:	50Ω

Mechanical


Size ^{*1} :	203*76*76mm 7.992*2.992*2.992in
RF Connectors:	SMA Female
Mounting:	6-M4mm depth 8mm

[1] Exclude connectors.

Environmental

Operating Temperature:	0~+40°C
Non-operating Temperature:	-10~+50°C

Outline Drawings

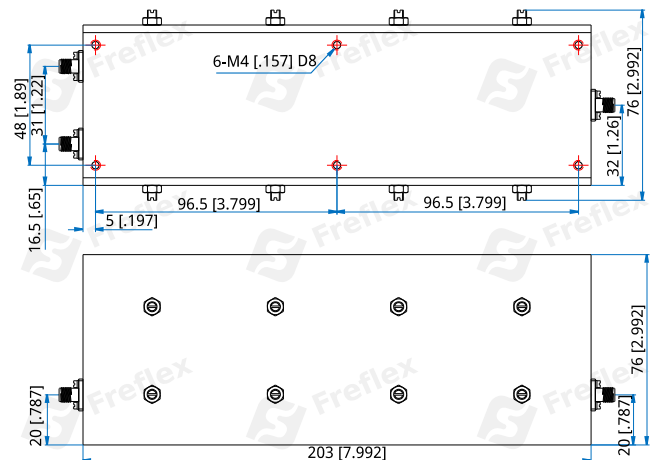

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-1710-1880-1

Customization is available upon request.