

# FMP2-20-6000-1

0.02~1.1GHz, 3~6GHz

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Transceivers
- \* Instrumentation

**Electrical**

Channel 1 (L):	0.02~1.1GHz
Channel 2 (H):	3~6GHz
Passband Insertion Loss:	2dB max.
Rejection(CH1):	45dB min. @1.35~6GHz
Rejection(CH2):	45dB min. @DC~2.5GHz
VSWR:	2 max.
Input Power:	1W max.
Impedance:	50Ω

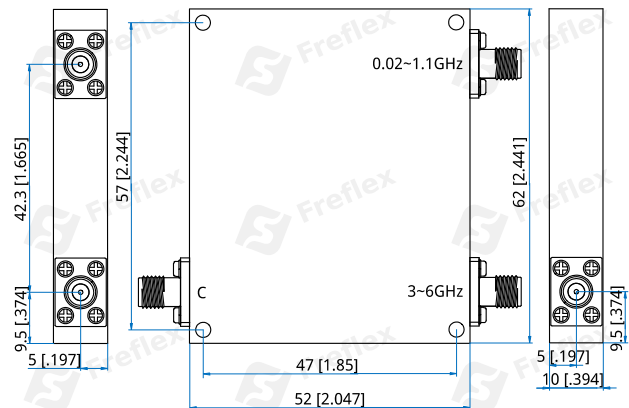
**Mechanical**

Size <sup>*1</sup> :	52*62*10mm 2.047*2.441*0.394in
RF Connectors:	SMA Female

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**FMP2-20-6000-1**

Customization is available upon request.