

FMP2-2000-12000-1

2~6GHz, 8~12GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	2~6GHz
Channel 2 (H):	8~12GHz
Passband Insertion Loss:	1dB max.
Rejection (L):	25dB min. @8~12GHz
Rejection (H):	25dB min. @2~6GHz
VSWR:	2 max.
Input Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	25*28*10mm
	0.984*1.102*0.394in
RF Connectors:	SMP male
Mounting:	4-Φ2.4mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

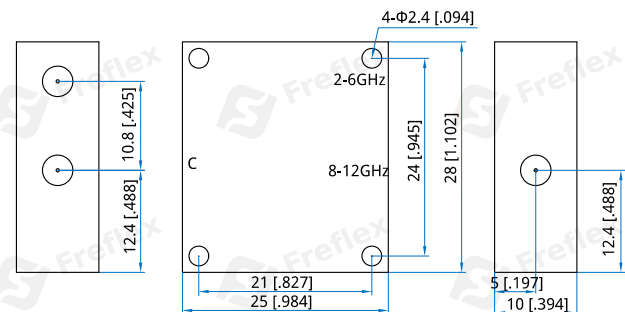

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-2000-12000-1

Customization is available upon request.