

FMP2-2300-3800-1

2.3~2.4GHz, 3.3~3.8GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (L):	2.3~2.4GHz
Channel 2 (H):	3.3~3.8GHz
Passband Insertion Loss:	1dB max.
Rejection (CH L):	50dB min. @3.3~3.8GHz
Rejection (CH H):	50dB min. @2.3~2.4GHz
VSWR:	1.5 max.
Input Power:	1W
Impedance:	50Ω

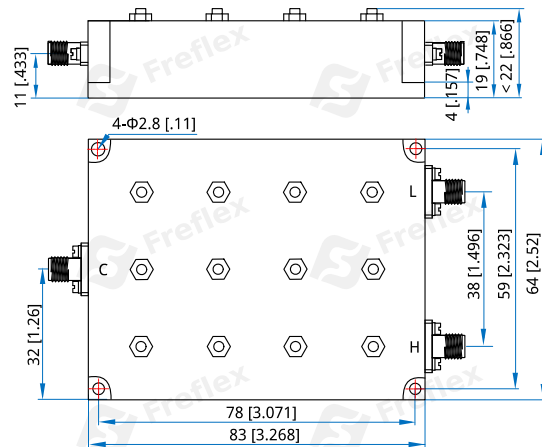
Mechanical

Size ^{*1} :	83*64*19mm 3.268*2.52*0.748in
RF Connectors:	SMA Female
Mounting:	4-Φ2.8 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FMP2-2300-3800-1

Customization is available upon request.