

FPVO-I-50-0.8

Internal Reference, 50MHz, 0.8GHz,

Features:

- * High Frequency Stability
- * Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Output Frequency:	0.8GHz
Frequency Stability:	±1ppm
Internal Reference:	50MHz
Output Power:	13dBm min.
Harmonic:	-20dBc max.
Spurious:	-70dBc max.
Phase Noise:	-90dBc/Hz@10KHz
Voltage:	+12V DC
Current:	280mA max.

Mechanical


Size ^{*1} :	50*40*10mm 1.969*1.575*0.394in
RF Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+75°C
------------------------	-----------

Outline Drawings

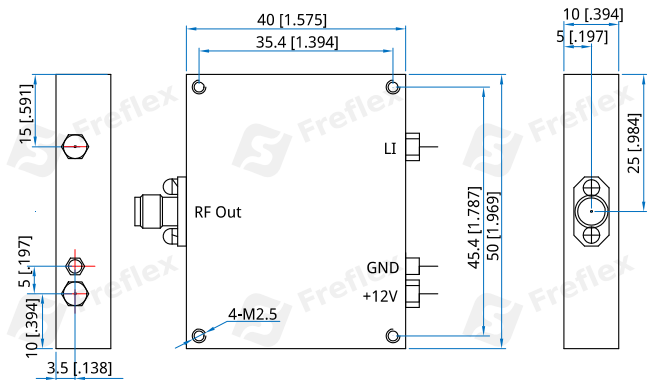

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPVO-I-50-0.8

Customization is available upon request.