

FPA-10-100-40-37S

10~100MHz, 40dB, 37dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	10~100MHz
Gain:	40dB min.
Gain Flatness:	1±1dB max.
Input VSWR:	1.6 max.
Output Power (Psat):	37dBm min.
Input Power:	2±1dBm +10dBm max.
Spurious:	-65dBc max.
Harmonic:	-10dBc max.
Voltage:	28V/3A VCC
Current:	0.7~1.2A max
Impedance:	50Ω

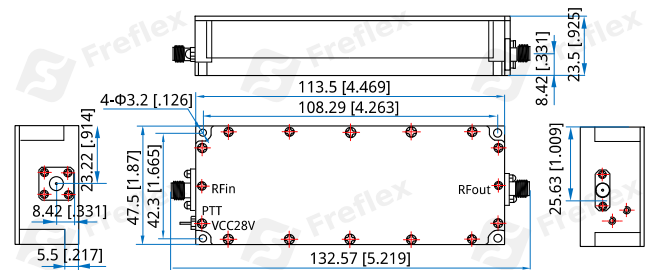
Mechanical

Size*1:	113.5*47.5*23.5mm 4.469*1.87*0.925in
RF In Connectors:	SMA Female
RF Out Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole
Power Supply Interface:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPA-10-100-40-37S

Customization is available upon request.