

FPA-20-700-53-54S

20~700MHz, 53dB, 54dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	20~700MHz
Gain:	53dB min.
Gain Flatness:	3±1dB max.
Input VSWR:	1.8 max.
Output Power (Psat):	54dBm min.
Input Power:	3±1dBm +10dBm max.
Spurious:	-65dBc max.
Harmonic:	-10dBc max.
Voltage:	36V/35A VCC
PTT:	3.3~5V (On)
Current:	20~29A max.
Impedance:	50Ω

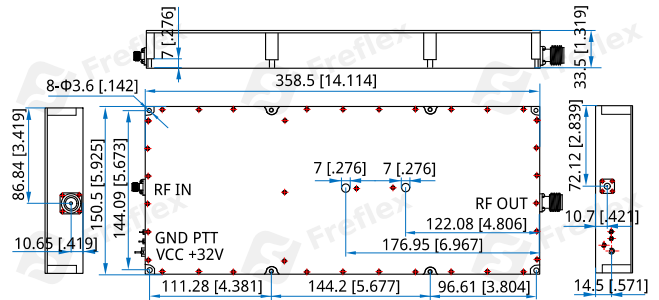
Mechanical

Size*1:	358.5*150.5*33.5mm 14.114*5.925*1.319in
RF In Connectors:	SMA Female
RF Out Connectors:	N Female
Mounting:	8-Φ3.6mm through-hole
Power Supply Interface:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature: -25~+55°C

Outline Drawings


Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FPA-20-700-53-54S

Customization is available upon request.