

# FPA-26000-33000-32-30.5S

26~33GHz, 32dB, 30.5dBm

**Features:**

- \* Small Size
- \* Low Power Consumption

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test

## Electrical

Frequency:	26~33GHz
Gain:	32dB min.
Gain Flatness:	±2.5dB typ.
Output Power (P1dB):	+29dBm min.
Output Power (Psat):	+30.5dBm typ.
Input VSWR:	2 typ.
Output VSWR:	2 typ.
Voltage:	+24V DC typ.
Current:	0.2A typ.
Impedance:	50Ω

## Absolute Maximum Ratings\*1

RF Input Power: +5dBm typ.

[1] Permanent damage may occur if any of these limits are exceeded.


## Mechanical

Size\*2: 50\*65\*14mm  
1.969\*2.559\*0.551in

RF Connectors: 2.92mm Female

[2] Exclude connectors and flanges.

## Outline Drawings

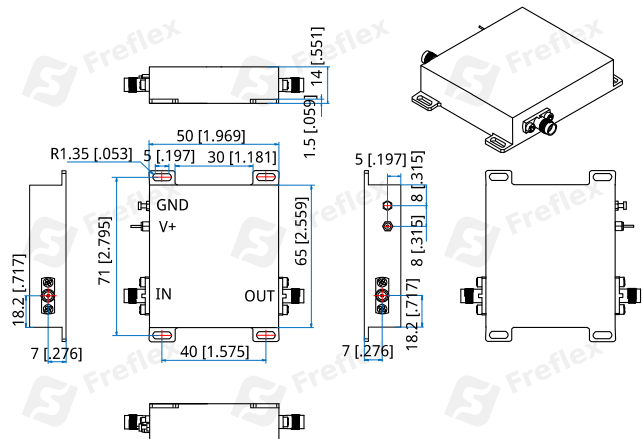

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

## How To Order

**FPA-26000-33000-32-30.5S**

Customization is available upon request.