

FPA-8000-10000-35-45S

8~10GHz, 35dB, 45dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	8~10GHz
Gain:	35dB min.
Gain Flatness:	3±1dB max.
Output Power (Psat):	45dBm min.
Spurious:	-65dBc max.
Harmonic:	-20dBc max.
Input VSWR:	1.8 max.
Voltage:	28V/6A (Reference) +30V max.
Current:	4.5A max.
PTT:	+5V (On)
Protection Function:	80°C protection

Mechanical

Size* ¹ :	120*83*18.5mm 4.724*3.268*0.728in
RF Connectors:	SMA female
Power Supply Interface* ² :	Feed through/Terminal post
Mounting:	7-Φ3.2mm through-hole


[1] Exclude connectors.

[2] Install heat sink during testing.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings

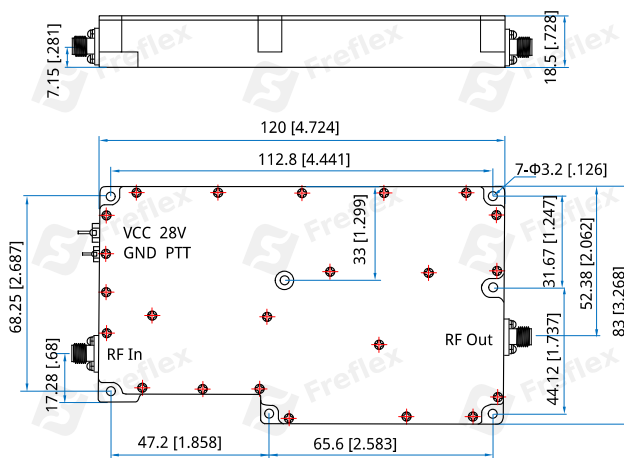

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPA-8000-10000-35-45S

Customization is available upon request.