

FCPL-MB-B70-01

SMP Connector, DC~26.5GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.1 max. @DC~6GHz 1.15 max. @6~10GHz 1.3 max. @10~18GHz
Impedance of Dielectric:	2000MΩ min.
Voltage Withstand:	335V DC
Impedance:	50Ω


Mechanical

RF Connector:	SMP Male
Mating Life Cycle:	500 cycles
Detent Mode:	Limited detent
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-65~+165°C
--------------	------------

Outline Drawings

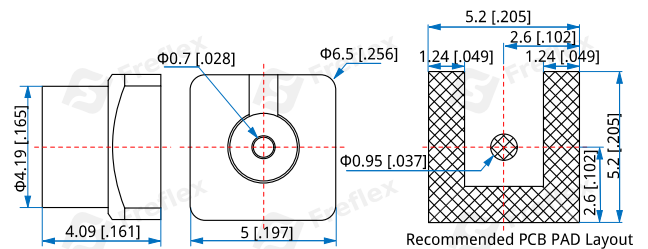

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

FCPL-MB-B70-01

Customization is available upon request.