

FDTP-40

DC~40GHz

Features:

- * Durable
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Microwave Test

Specifications

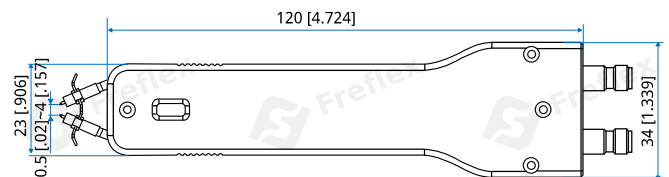
Frequency (GHz)	Probe Pitch (mm)	Configuration	TDR Control Activation Force	Connector
DC~40	0.5~4 (signal tip to signal tip)	SS	TBD	2.92mm female

Electrical

Frequency: DC~40GHz
 Impedance: 100Ω

Mechanical

Connector Life Cycle: 500 cycles

Outline Drawings


Unit: mm [inch]

Tolerance: ±0.3mm [±0.012in]

How To Orde
FDTP-40-V-W-X-Y

- V: Configuration Type.
- W: Start Probe Pitch in mm
- X: Stop Probe Pitch in mm
- Y: Connector type.

Connector naming rules:

K - 2.92mm female

Examples:

To order a Differential TDR Probe, DC~40GHz, SS, Probe Pitch 0.5~4mm, 2.92mm female, specify FDTP-40-SS-05-4-K.