

FRC4-850-1150-3K-7

4-Way, 0.85~1.15GHz, 3000W

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:

- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical

Frequency:	0.85~1.15GHz
Insertion Loss* ¹ :	0.6dB max. (AVG)
VSWR (SUM Port):	1.5 max.
Amplitude Balance:	±0.4dB max.
Phase Balance:	10° max.
Impedance:	50Ω
Power @SUM Port:	3000W as combiner


[1] Excluding theoretical loss 6dB.

Mechanical

Size* ² :	Φ240*51mm
	Φ9.449*2.008in
Connectors:	7/16 DIN (L29) female

[2] Exclude connectors.

Outline Drawings

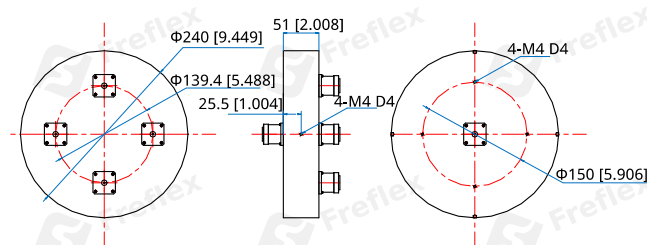

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FRC4-850-1150-3K-7

Customization is available upon request.