

# FSPTT

## TNC to TNC

Features:  
\* Broadband

Applications:  
\* Any Applications

### Electrical

Frequency:	DC~3GHz DC~6GHz (Outline B)
VSWR:	1.2 max. 1.25 max. (Outline B)
Insertion Loss:	0.25dB max. 0.45dB max. (Outline B)
RF Power Transmission:	200W
Dielectric Withstanding Voltage:	2500V RMS, 50Hz, at sea level, min.
Working Voltage (DC):	230V* <sup>1</sup>
Lightning Surge Current:	20kA
Ground Wire Diameter:	8 mm <sup>2</sup> max. 4 mm <sup>2</sup> max. (Outline B)
Impedance of Dielectric:	500MΩ min.
Impedance of Contact (Center):	1.5mΩ max.
Impedance of Contact (Outer):	1mΩ max.
Impedance:	50Ω

[1] Default 230V, available for 90V, 150V, 350V and 600V.


### Mechanical

RF Connector:	TNC
Mating Life Cycle:	500 cycles min.
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass
Gaskets:	Stainless steel

### Environmental

Temperature:	-40~+85°C -45~+125°C (Outline B)
Ingress Protection (IP) Rating:	IP 67 (Outline A)
Relative Humidity:	95% max. @25°C±2°C

### Outline Drawings

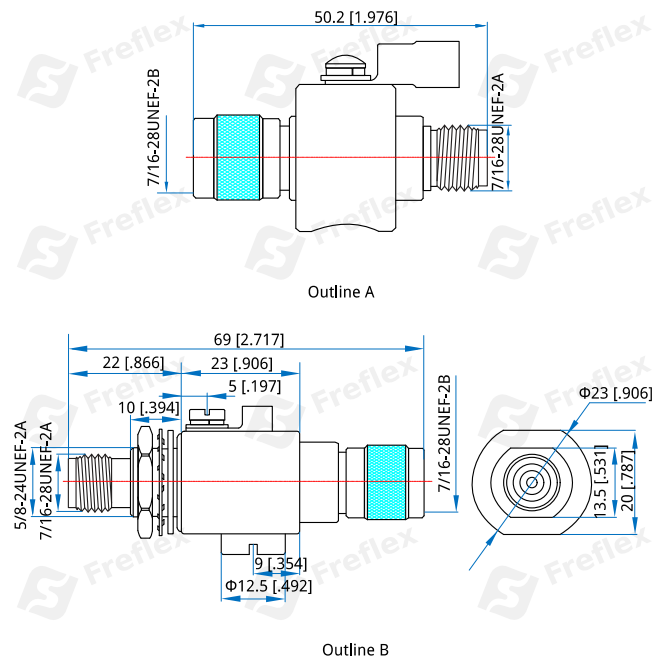

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FSPTT-MF-03** - TNC(m) to TNC(f), DC~3GHz, Outline A

**FSPTT-MF-06** - TNC(m) to TNC(f), DC~6GHz, Outline B

Customization is available upon request.