

FWRJ1-12500-X-I-A

Single Channel, 8.2~12.5GHz, Xmm, I-type

Features:

- * Low VSWR
- * Low VSWR Flatness
- * Low Insertion Loss Flatness

Applications:

- * High Speed Digital Signal Transmission
- * Analog Signal Transmission

Electrical

Frequency:	8.2~12.5GHz
VSWR:	1.2 max.
VSWR Flatness:	0.1dB max.
Insertion Loss:	0.15dB max.
Insertion Loss Flatness:	0.05dB max.
Phase Balance:	±3° max.
Average Power:	20KW max.
Peak Power:	2GW max.


Mechanical

Interface:	WR-90 (BJ100)
Flange:	FDP100
Material:	Aluminum alloy
Rotating Speed:	20RPM max.
Starting Torque:	0.8Nm max.
Rated Continuous Torque:	0.5Nm max.
Operation Life:	3M cycles min.
Style:	I-type
IP Grade:	IP41

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-45~+80°C
Humidity:	95% max.

Outline Drawings

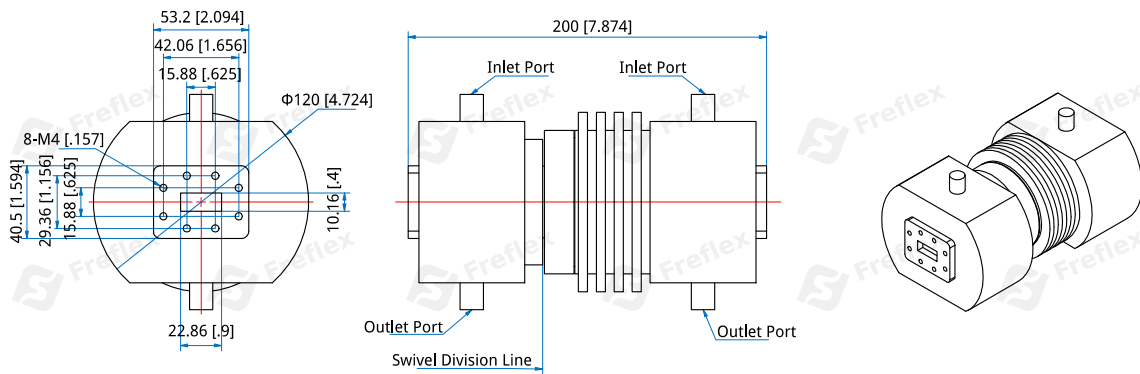

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FWRJ1-12500-X-I-A

Customization is available upon request.