

FWRJ1-14500-46-L-A

Single Channel, 13.75~14.5GHz, 46mm, L-type

Features:

- * Low VSWR
- * Low VSWR Flatness
- * Low Insertion Loss Flatness

Applications:

- * High Speed Digital Signal Transmission
- * Analog Signal Transmission

Electrical

Frequency:	13.75~14.5GHz
VSWR:	1.2 max.
VSWR Flatness:	0.1 max.
Insertion Loss:	0.2dB max.
Insertion Loss Flatness:	0.05 dB max.
Average Power:	200W max.
Peak Power:	5000W max.
IP Grade:	IP40


Mechanical

Interface:	WR-75 (BJ120)
Flange:	FBP120
Rotating Speed:	120RPM max.
Operation Life:	10M Cycles
Material:	Aluminium
Finish:	Conductive oxidation
Style:	L-type

Environmental

Temperature:	-40~+85
--------------	---------

Outline Drawings

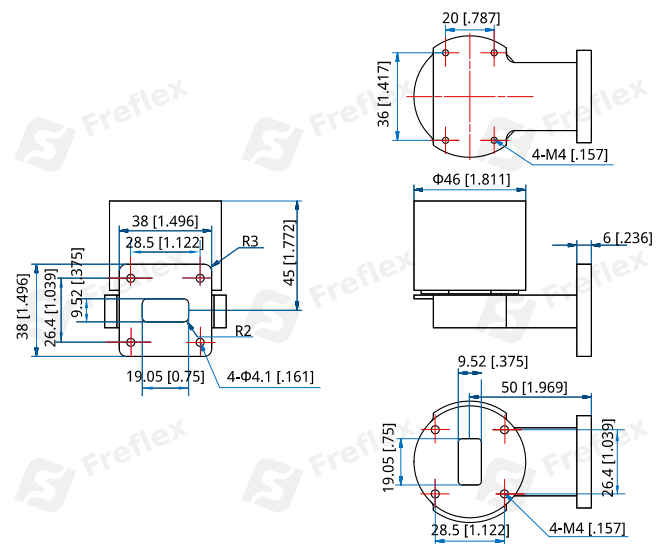

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FWRJ1-14500-46-L-A

Customization is available upon request.