

## FWRJ1-18000-42-I-A

Single Channel, 6.5~18GHz, 42mm, I-type

**Features:**

- \* Low VSWR
- \* Low VSWR Flatness
- \* Low Insertion Loss Flatness

**Applications:**

- \* High Speed Digital Signal Transmission
- \* Analog Signal Transmission

**Electrical**

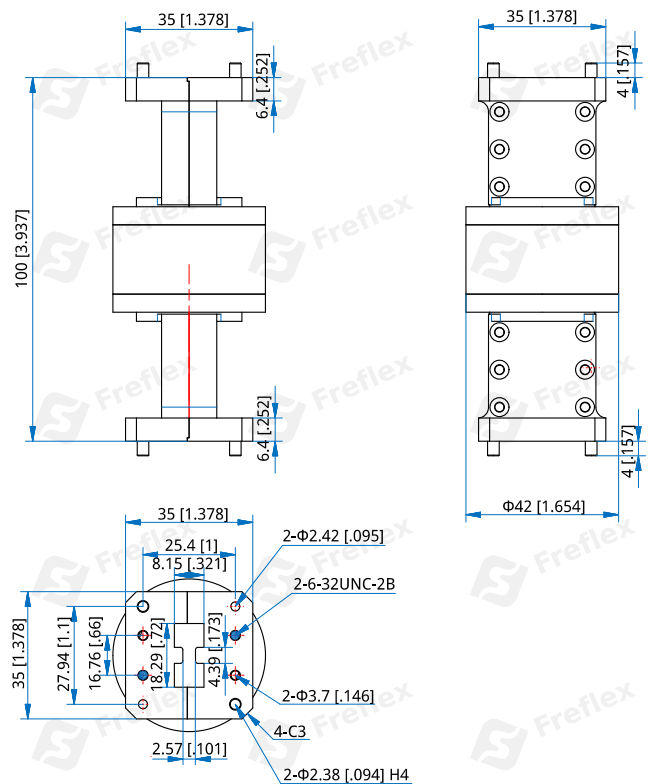
Frequency:	6.5~18GHz
VSWR:	1.35 max.
Insertion Loss:	0.45dB max.

**Mechanical**

Interface:	WRD-650
Flange:	FPWRD650
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint
Style:	I-type

**Environmental**

Temperature:	-40~+85
--------------	---------

**Outline Drawings**


Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

**How To Order**

**FWRJ1-18000-42-I-A**

Customization is available upon request.