

## FWRJ1-18000-42-L-A

Single Channel, 7.5~18GHz, 42mm, L-type

### Features:

- \* Low VSWR
- \* Low VSWR Flatness
- \* Low Insertion Loss Flatness

### Applications:

- \* High Speed Digital Signal Transmission
- \* Analog Signal Transmission

### Electrical

Frequency:	7.5~18GHz
VSWR:	1.35 max.
Insertion Loss:	0.45dB max.

### Mechanical

Interface:	WRD-750
Flange:	FPWRD750
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint
Style:	L-type

### Environmental


Temperature:	-40~+85
--------------	---------

### How To Order

**FWRJ1-18000-42-L-A**

Customization is available upon request.

### Outline Drawings

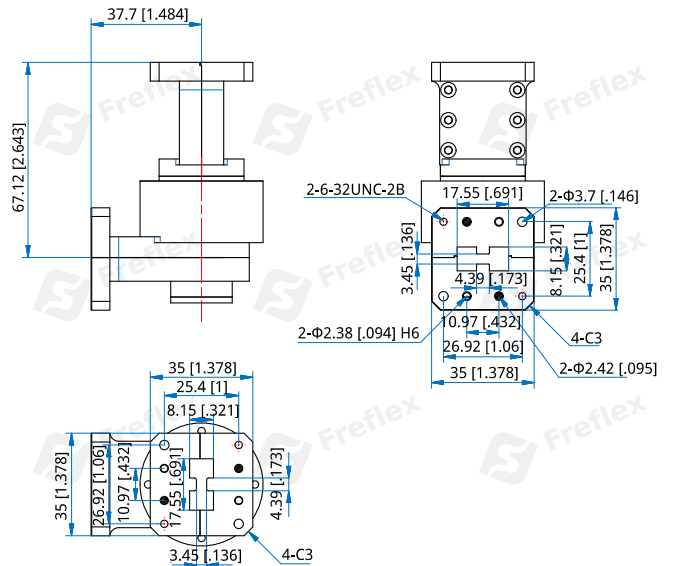

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]