

FWRJ1-18000-X-L-A

Single Channel, 6.5~18GHz, Xmm, L-type

Features:

- * Low VSWR
- * Low VSWR Flatness
- * Low Insertion Loss Flatness

Applications:

- * High Speed Digital Signal Transmission
- * Analog Signal Transmission

Electrical

Frequency:	6.5~18GHz
VSWR:	1.35 max.
Insertion Loss:	0.45dB max.

Mechanical

Interface:	WRD-650
Flange:	FPWRD650
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint
Style:	L-type

Environmental


Temperature:	-40~+85
--------------	---------

How To Order

FWRJ1-18000-X-L-A

Customization is available upon request.

Outline Drawings

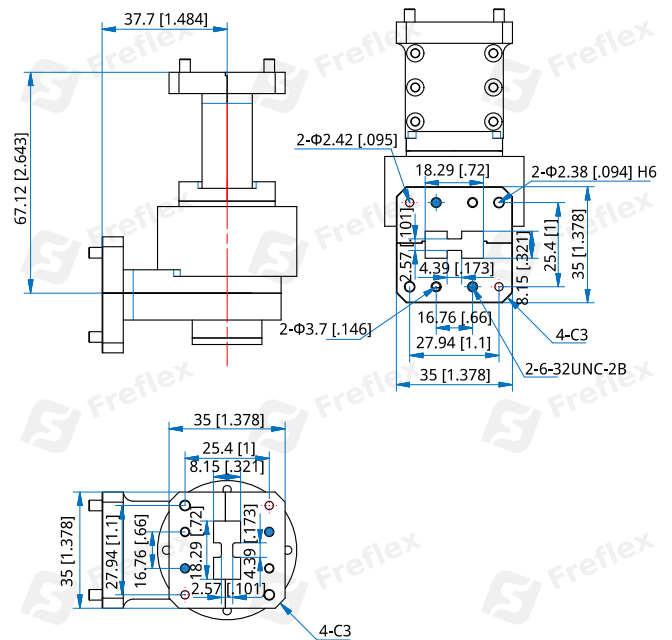

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]