

FSDC-100-600-K2-40-N

0.1~0.6GHz, 200W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.1~0.6GHz
Insertion Loss:	0.3dB max.
Coupling:	40±1dB max.
Coupling Flatness:	±1dB
Directivity:	18dB min.
VSWR (Mainline):	1.3 max.
Power (Mainline):	200W max.
Impedance:	50Ω

Mechanical

Size* ¹ :	73*50*26mm 2.874*1.969*1.024in
Connectors:	N Female

[1] Exclude connectors.

Environmental


Temperature:	-55~+85°C
--------------	-----------

How To Order

FSDC-100-600-K2-40-N

Customization is available upon request.

Outline Drawings

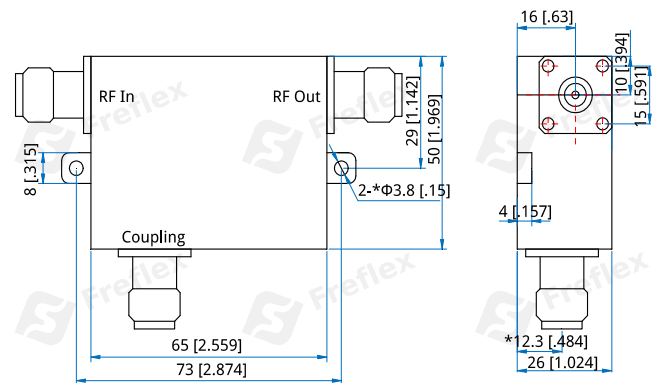

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

*Ensure dimensions for design.