

## FSDC-2000-18000-20-40-S

2~18GHz, 20W

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	2~18GHz
Insertion Loss:	1.5dB max.
Coupling:	40±2dB
Directivity:	7dB min.
VSWR:	1.6 max.
Average Power:	20W
Impedance:	50Ω

### Mechanical

Size <sup>*1</sup> :	43*18*11mm
	1.693*0.709*0.433in
Connectors:	SMA Female
Mounting:	3-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

### Outline Drawings

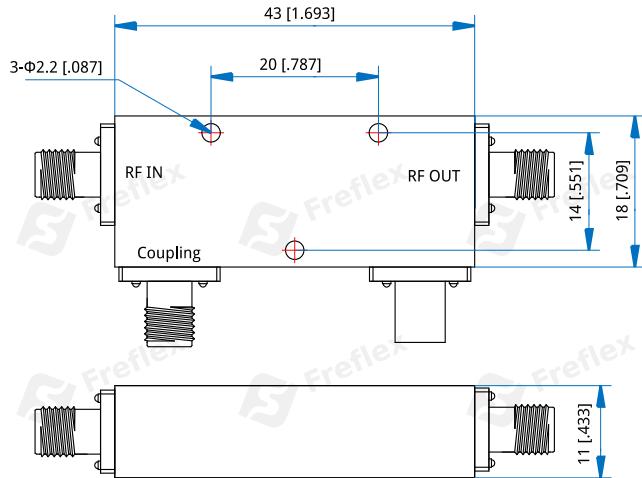

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**FSDC-2000-18000-20-40-S**

Customization is available upon request.