

FSDC-400-2000-50-40-S

0.4~2GHz, 50W, 40dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.4~2GHz
Insertion Loss:	0.5dB max.
Coupling:	40±1.5dB
Directivity:	13dB min.
VSWR (Mainline):	1.35 max.
Average Power:	50W
Impedance:	50Ω

Mechanical


Size ^{*1} :	225.9*20*12.7mm 8.894*0.787*0.5in
Connectors:	SMA Female
Mounting:	8x #4-40 6.35DP

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

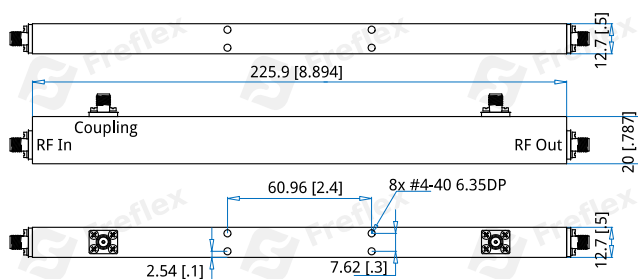

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FSDC-400-2000-50-40-S

Customization is available upon request.