

FSDC-4000-20000-20-20-S

4~20GHz, 20W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	4~20GHz
Insertion Loss:	0.6dB max.
Coupling:	20±1dB max.
Coupling Flatness:	±1dB max.
Directivity:	10dB min.
VSWR:	1.6 max.
Average Power:	20W

Mechanical


Size ^{*1} :	35.56*16.764*10.16mm 1.4*0.66*0.4in
Connectors:	SMA Female
Mounting:	2-Φ2.642mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

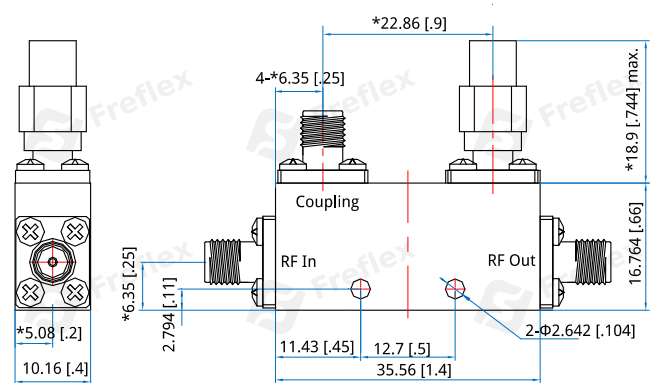

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

*Ensure dimensions for design.

How To Order

FSDC-4000-20000-20-20-S

Customization is available upon request.